



TECHNICAL DATA	
RATING	10kVA
PRIMARY VOLTAGE(V)	24940
SECONDARY VOLTAGE(V)	120/240
INSULATION LEVEL(kV)H.V BIL	150
INSULATION LEVEL(kV)L.V BIL	30
FREQUENCY	60Hz
VECTOR GROUP	LI6
CONDUCTOR	ALUMINUM
POSITION OFF-LOAD TAP CHANGER	±2×2.5%
INSULATING OIL	MINERAL OIL
TEMPERATURE RISE	65°C
LOAD LOSS AT RATED VOLTAGE	230W
NO LOAD LOSSES	45W
IMPEDANCE	2.0%--3.0%
ALTITUDE	≤ 1000m
COLOR	MUNSELL 5BG 7.0/4 GRAY
POLARITY	ADDITIVE
APPLIED STANDARD.	CSA C2.1 CSA C802.1

ITEM	WEIGHT
UNTANK WEIGHT	116kg
TOTAL OIL WEIGHT	95kg
TOTAL WEIGHT	260kg



ITEM	DESCRIPTION	QTY
1	Core&Coil Assemble	1
2	Tank Cover	1
3	Pressure Relief Device	1
4	Grounding Terminal	3
5	Tap Changer	1
6	Mark	1
7	Nameplate	1
8	LV Bushing	3
9	Lifting Hook	2
10	HV Bushing	2
11	Lightning Arrester Nut	4
12	Electrical Connection Of The Cover To The Tank	1
13	Copper Strip	1
14	Stainless Tank	1
15	Transformer Oil	

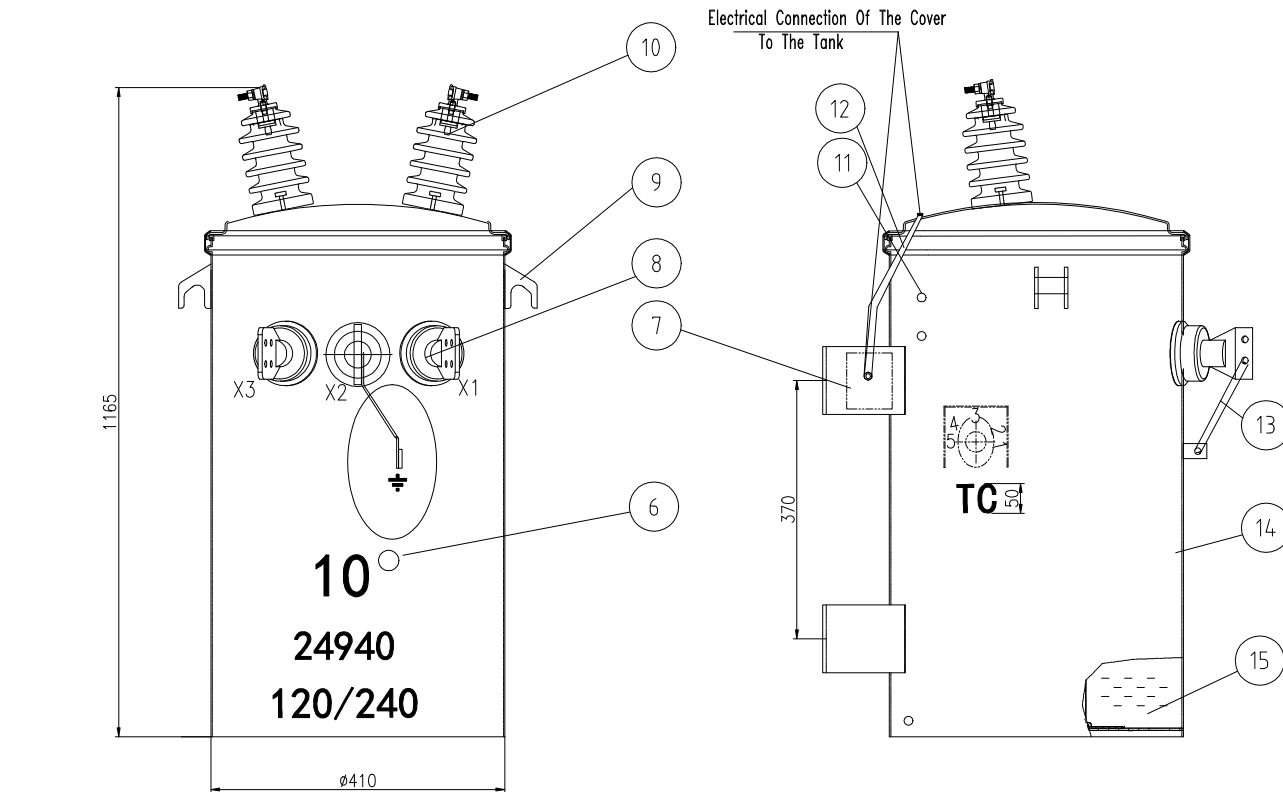


All Decal/Stencils to be white

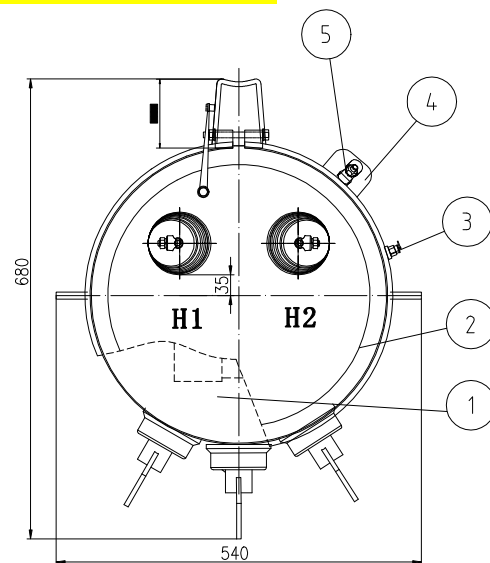


HV BUSHING TERMINAL

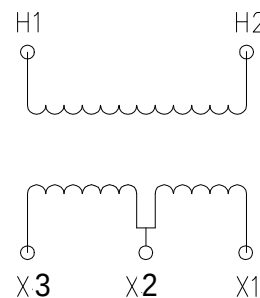

Low-Voltage Grounding Strap Connection

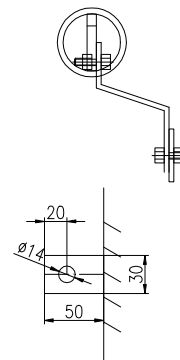

LV BUSHING TERMINAL



				ZPDL-10/24.94/0.12-0.24	DL10-240510-01
				Outling Drawing	
Design	XBW	Standardiza		JIEZOU POWER	
Check	IRIS				
VERIFY					
Approve	SAM	Date			

Updated drawing DL-10-24.94-0.12(0.24)

Final Audit Report

2024-05-23

Created:	2024-05-22
By:	Cherisse Bartlett (samantha@boundaryelectric.com)
Status:	Signed
Transaction ID:	CBJCHBCAABAAPtdkAjOYRQVHNaZusUBonIVbkJemU81H

"Updated drawing DL-10-24.94-0.12(0.24)" History

-  Document created by Cherisse Bartlett (samantha@boundaryelectric.com)
2024-05-22 - 5:35:49 PM GMT
-  Document emailed to Ryan (ryan@boundaryelectric.com) for signature
2024-05-22 - 5:35:55 PM GMT
-  Email viewed by Ryan (ryan@boundaryelectric.com)
2024-05-23 - 9:45:13 PM GMT
-  Signer Ryan (ryan@boundaryelectric.com) entered name at signing as Ryan Vaugeois
2024-05-23 - 10:07:41 PM GMT
-  Document e-signed by Ryan Vaugeois (ryan@boundaryelectric.com)
Signature Date: 2024-05-23 - 10:07:43 PM GMT - Time Source: server
-  Agreement completed.
2024-05-23 - 10:07:43 PM GMT